

# KEST™

Your source for reliable Relays & Sockets

## KS2E-M - Series











### Miniature Power Relay



E323872



<b>Dimension:</b>	21 x 10 x 12mm
<b>Coil Voltage:</b>	3, 5, 12, 24 VDC
<b>Contact Current (A)</b>	2 A
<b>Coil Power:</b>	0.20W
<b>Contact Rating:</b>	2A/28Vdc 0.5A, 1A/125Vac, 30Vdc
<b>Contact Arrangement:</b>	2 Form C
<b>Max. Switching Power:</b>	48W 60VA
<b>Max. Switching Voltage:</b>	24Vdc 220Vac
<b>Contact Material:</b>	Ag AgNi (Au clad)
<b>Contact Resistance:</b>	≤50m Ω
<b>Insulation Resistance:</b>	1000M Ω
<b>Operating Temperature:</b>	-30°C ~ 70°C
<b>Electrical Life:</b>	10 <sup>5</sup> times
<b>Dielectric Strength</b>	<b>Mechanical Life:</b> 10 <sup>7</sup> times
<b>Coil and Contact:</b>	500V (50Hz)
<b>Weight (Approx.):</b>	5grams (2oz.) 1000V (50Hz)

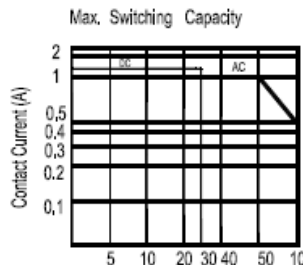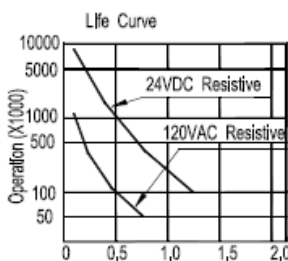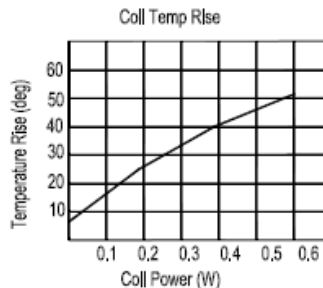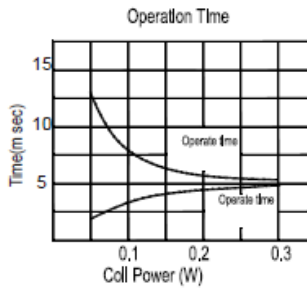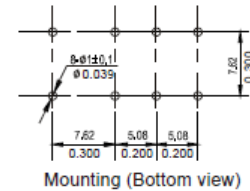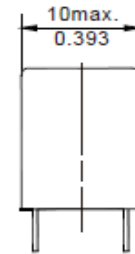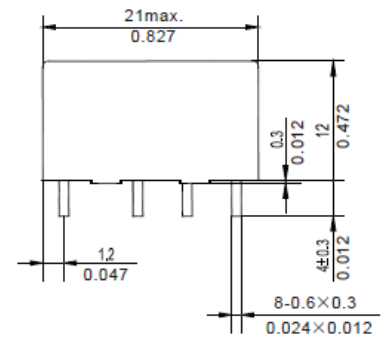

Wiring diagram (Bottom view)

\*Comparable to most Industry Standard Application  
©Copyright 2010 KEST™ – All rights reserved